





#### PREMIUM COMFORT AND DURABILITY

With power and versatility, Villager 6 comes equipped with a rustproof frame and an independent front suspension system that delivers a smooth ride every time.



Max Vehicle Capacity 1500 lbs









#### **IMPRESS WITH OUR** "LITTLE LIMO"

Comfort, style, and reliability—the Villager 8 moves up to eight people in a single trip while easily navigating narrow areas not accessible to conventional vehicles, making it a great alternative to expensive vans.



17 mph



Max Vehicle Capacity 1500 lbs





## **Tempo** 2+2

## **PULL UP IN STYLE**

Sleek, compact design gives you a tight turn radius for easy mobility. Plus, transform the backseat into a convenient cargo bed for additional hauling.



Max Speed

15 mph





Capacity

800 lbs



Capacity



## TRANSPORTER

## **FLEXIBLE HAULING**

Built for versatility, the Carryall Transporter is designed to carry four to six passengers and additional cargo wherever you need it. Plus, available fit-to-task equipment allows you to customize your vehicle for the job at hand.









## *TRANSPORTER™ XL*

#### PEOPLE, EQUIPMENT, & EVERYTHING IN BETWEEN

Our new XL Transporter is the most costeffective and customizable transportation vehicle yet. Go from hauling to transportingor a combination of both—all on the durable Transporter platform.



Max Speed 17 mph



Max Vehicle

Capacity

1500 lbs








4-8



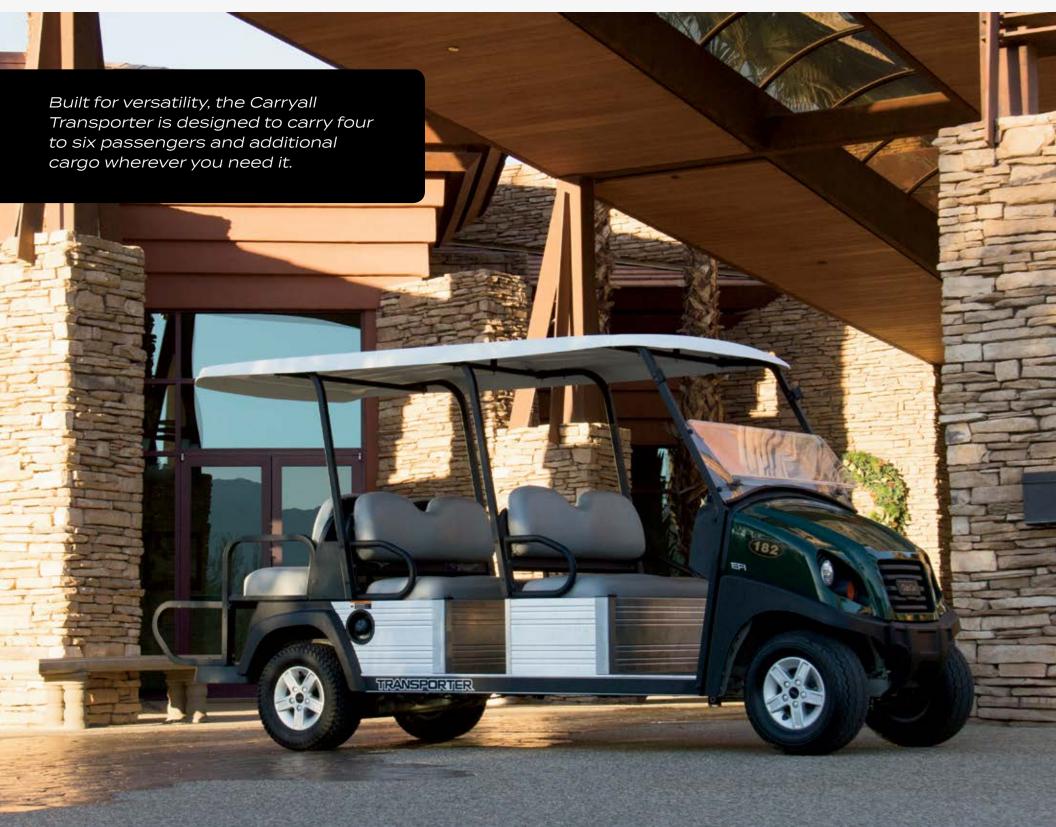

Club Car



#### **TRANSPORTER**



# TRANSPORTER" XL



Black







GASOLINE ELECTRIC

GASOLINE ELECTRIC

GASOLINE ELECTRIC

GASOLINE ELECTRIC

GASOLINE ELEC

| ENGINE                | Kohler EFI Gas  | 48-volt DC  | Kohler EFI Gas  | 48-volt DC  | Kohler EFI Gas  | 48-volt DC  | Kohler EFI Gas  | 48-volt DC  | Kohler EFI Gas  | 48-volt DC   |
|-----------------------|---|---|---|---|---|---|---|---|---|--|
|                       |   |   |   |   |   |   |   |   |   |  |
| HORSEPOWER            | 14 hp<br>(10.3 kW) rated @<br>3600 RPM<br>per SAE J1940                       | 3.3 hp (2.4 kW) rated;<br>peak 13 hp (9.6 kW)                                     | 14 hp<br>(10.3 kW) rated ©<br>3600 RPM<br>per SAE J1940                       | 3.7 hp (2.7 kW) rated;<br>peak 20 hp (14.9 kW)  | 14 hp<br>(10.3 kW) rated @<br>3600 RPM<br>per SAE J1940                       | 3.7 hp (2.7 kW) rated;<br>peak 20 hp (14.9 kW)  | 14 hp<br>(10.3 kW) rated @<br>3600 RPM<br>per SAE J1940                       | 3.7 hp (2.7 kW) rated;<br>peak 20 hp (14.9 kW)  | 14 hp<br>(10.3 kW) rated @<br>3600 RPM<br>per SAE J1940                       | 3.7 hp (2.7 kW) rated;<br>peak 20 hp (14.9 kW)   |
| GOVERNOR GUARD        | Ground speed  | N/A   | Ground speed  | N/A   | Ground speed  | N/A   | Ground speed  | N/A   | Ground speed  | N/A  |
| BATTERIES             | 12-volt 500 CCA<br>105 min reserve  | Six 8-volt<br>flooded lead acid   | 12-volt 500 CCA<br>105 min reserve  | Eight 6-volt<br>flooded lead acid   | 12-volt 500 CCA<br>105 min reserve  | Eight 6-volt<br>flooded lead acid   | 12-volt 500 CCA<br>105 min reserve  | Eight 6-volt<br>flooded lead acid   | 12-volt 500 CCA<br>105 min reserve  | Eight 6-volt<br>flooded lead acid  |
| CHARGER               | N/A   | E.R.I.C.<br>(650 W high<br>frequency)   | N/A   | DeltaQ QuiQ<br>(1 kW High Frequency)  | N/A   | DeltaQ QuiQ<br>(1 kW High Frequency)  | N/A   | Onboard, automatic,<br>computer-controlled<br>48-volt DC, 17 amp,<br>UL and CUL listed        | N/A   | Onboard, automatic,<br>computer-controlled<br>48-volt DC, 17 amp,<br>UL and CUL listed |
| STEERING              | Self-adjusting rack and pinion  | Self-adjusting rack and pinion  | Self-adjusting rack and pinion  | Self-adjusting rack and pinion  | Self-adjusting rack and pinion  | Self-adjusting rack and pinion  | Self-adjusting rack and pinion  | Self-adjusting rack and pinion  | Self-adjusting rack and pinion  | Self-adjusting rack and pinion   |
| FRONT<br>SUSPENSION   | Independent leaf<br>spring with dual<br>hydraulic shocks                      | Independent leaf<br>spring with dual<br>hydraulic shocks                          | Independent leaf<br>spring with dual<br>hydraulic shocks                      | Independent leaf<br>spring with dual<br>hydraulic shocks                                      | Independent leaf<br>spring with dual<br>hydraulic shocks                      | Independent leaf<br>spring with dual<br>hydraulic shocks                                      | Independent leaf<br>spring with dual<br>hydraulic shocks                      | Independent leaf<br>spring with dual<br>hydraulic shocks                                      | Independent leaf<br>spring with dual<br>hydraulic shocks                      | Independent leaf<br>spring with dual<br>hydraulic shocks                               |
| BRAKES                | Rear wheel<br>mechanical drum   | Rear wheel<br>mechanical drum   | 4-wheel<br>mechanical drum  | 4-wheel<br>mechanical drum  | 4-wheel<br>mechanical drum  | 4-wheel<br>mechanical drum  | 4-wheel<br>mechanical drum  | 4-wheel<br>mechanical drum  | 4-wheel<br>mechanical drum  | 4-wheel<br>mechanical drum   |
| PARK BRAKE            | Foot operated,<br>multi-lock  | Foot operated,<br>multi-lock  | Foot operated,<br>multi-lock  | Foot operated,<br>multi-lock  | Foot operated,<br>multi-lock  | Foot operated,<br>multi-lock  | Foot operated,<br>multi-lock  | Foot operated,<br>multi-lock  | Foot operated,<br>multi-lock  | Foot operated,<br>multi-lock   |
| BODY AND FINISH       | Molded-in color,<br>aluminum finish   | Molded-in color,<br>aluminum finish   | ArmorFlex™ with automotive paint/ clearcoat, aluminum finish                  | ArmorFlex™ with<br>automotive paint/<br>clearcoat,<br>aluminum finish                         | ArmorFlex™ with<br>automotive paint/<br>clearcoat,<br>aluminum finish         | ArmorFlex™ with<br>automotive paint/<br>clearcoat,<br>aluminum finish                         | ArmorFlex™ with automotive paint/ clearcoat, aluminum finish                  | ArmorFlex™ with<br>automotive paint/<br>clearcoat,<br>aluminum finish                         | ArmorFlex™ with<br>automotive paint/<br>clearcoat,<br>aluminum finish         | ArmorFlex™ with<br>automotive paint/<br>clearcoat,<br>aluminum finish                  |
| TIRES                 | 18 x 8.50-8, 4-ply<br>rated, premium tread                                    | 18 x 8.50-8, 4-ply<br>rated, premium tread  | 20 x 10-10, 6-ply<br>rated, premium tread                                     | 20 x 10-10, 6-ply<br>rated, premium tread   | 20 x 10-10, 6-ply<br>rated, premium tread                                     | 20 x 10-10, 6-ply<br>rated, premium tread   | 18 x 8.50-8, 4-ply<br>rated, premium tread                                    | 18 x 8.50-8, 4-ply<br>rated, premium tread  | 18 x 6.50-8, 6-ply<br>rated, premium tread                                    | 18 x 6.50-8, 6-ply<br>rated, premium tread   |
| BEDLxWxH              | N/A   | N/A   | 37 x 47.5 x 10.5 in<br>(94 x 120 x 27 cm)<br>(Cargo Box)                      | 37 x 47.5 x 10.5 in<br>(94 x 120 x 27 cm)<br>(Cargo Box)                                      | N/A   | N/A   | N/A   | N/A   | N/A   | N/A  |
| WHEELBASE             | 65.5 in (166 cm)  | 65.5 in (166 cm)  | 99.1 in (252 cm)  | 99.1 in (252 cm)  | 132.1 in (336 cm)   | 132.1 in (336 cm)   | 98.5 in (250 cm)  | 98.5 in (250 cm)  | 131.5 in (334 cm)   | 131.5 in (334 cm)  |
| GROUND<br>CLEARANCE   | 4.5 in (11 cm)  | 4.5 in (11 cm)  | 5.6 in (14 cm)  | 5.2 in (14 cm)  | 5.6 in (14 cm)  | 5.2 in (14 cm)  | 4.5 in (11 cm)  | 4.5 in (11 cm)  | 4.5 in (11 cm)  | 4.5 in (11 cm)   |
| FUEL TANK<br>CAPACITY | 5.5 gal (20.8 L)  | N/A   | 5.5 gal (20.8 L)  | N/A   | 5.5 gal (20.8 L)  | N/A   | 5.5 gal (20.8 L)  | N/A   | 5.5 gal (20.8 L)  | N/A  |
| CURB WEIGHT           | N/A   | N/A   | 932 lb (423 kg)<br>stakeside;<br>943 lb (428 kg)<br>with rear seat            | 1494 lb (678 kg)<br>stakeside;<br>1505 lbs (684 kg)<br>with rear seat                         | 1104 lb (501 kg)<br>8 passenger   | 1646 lb (747 kg)<br>8 passenger   | 773 lb (350 kg)   | 1105 lb (502 kg)  | 894 lb (405 kg)   | 1219 lb (554 kg)   |
| SPEED RANGE           | 12–15 mph<br>(19.3–24.1 km/h)   | 5–15 mph<br>(8–24.1 km/h)   | 15–17 mph<br>(24–27 km/h)   | 15–17 mph<br>(24–27 km/h)   | 15–17 mph<br>(24–27 km/h)   | 15–17 mph<br>(24–27 km/h)   | 15–17 mph<br>(24–27 km/h)   | 15–17 mph<br>(24–27 km/h)   | 15–17 mph<br>(24–27 km/h)   | 15–17 mph<br>(24–27 km/h)  |
| LIMITED WARRANTY      | 3 yr/3000 hr limited<br>powertrain/frame<br>2 yr limited<br>remaining vehicle | 4 yr limited battery 3 yr limited powertrain/frame 2 yr limited remaining vehicle | 3 yr/3000 hr limited<br>powertrain/frame<br>2 yr limited remaining<br>vehicle | 4 yr limited battery<br>3 yr limited<br>powertrain/frame<br>2 yr limited<br>remaining vehicle | 3 yr/3000 hr limited<br>powertrain/frame<br>2 yr limited<br>remaining vehicle | 4 yr limited battery<br>3 yr limited<br>powertrain/frame<br>2 yr limited<br>remaining vehicle | 3 yr/3000 hr limited<br>powertrain/frame<br>2 yr limited<br>remaining vehicle | 4 yr limited battery<br>3 yr limited<br>powertrain/frame<br>2 yr limited<br>remaining vehicle | 3 yr/3000 hr limited<br>powertrain/frame<br>2 yr limited<br>remaining vehicle | 4 yr limited battery 3 yr limited powertrain/frame 2 yr limited remaining vehicle      |
| ,                     |   |   |   |   |   |   |   |   |   |  |

Titanium

Standard Colors (Molded-in)

Red



White

(COMMO049) ©2019

Dark Gray

Dark Green

Beige

Bright Blue

Classic Blue